
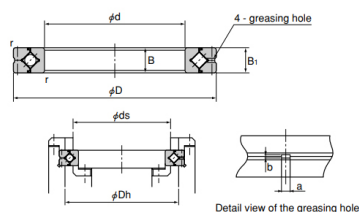


RB Crossed Roller Bearings



| Выбрать запрос Подшипники | | | inner ring | outer ring | Roller pitch circle diameter | width | Greasing hole | Chamfer | Shoulder height | Basic load rating | radial | weight | |
|---------------------------|-----|-----|------------|------------|------------------------------|---------|---------------|---------|-----------------|-------------------|--------|--------|----|
| | | | д: мм | Д: мм | dp мм | B B1 мм | a-b | г (мин) | дс | Dh | C kN | C0 kN | кг |
| RB15025 | 150 | 210 | 178 | 25 | 3.5-2 | 2 | 164 | 194 | 76.8 | 128 | 3.16 | | |
| RB15030 | 150 | 230 | 188 | 30 | 4.5-3 | 3 | 173 | 211 | 100 | 156 | 5.3 | | |
| RB16025 | 160 | 220 | 188.6 | 25 | 3.5-2 | 2 | 173 | 204 | 81.7 | 135 | 3.14 | | |
| RB17020 | 170 | 220 | 191 | 20 | 3.5-1.6 | 1.5 | 184 | 198 | 29 | 62.1 | 2.11 | | |
| RB18025 | 180 | 240 | 210 | 25 | 3.5-2 | 1.5 | 195 | 225 | 84 | 143 | 3.44 | | |
| RB19025 | 190 | 240 | 211.9 | 25 | 3.5-1.6 | 1 | 202 | 222 | 41.7 | 82.9 | 2.99 | | |
| RB20025 | 200 | 260 | 230 | 25 | 3.5-2 | 2 | 215 | 245 | 84.2 | 157 | 4 | | |
| RB20030 | 200 | 280 | 240 | 30 | 4.5-3 | 2 | 221 | 258 | 114 | 200 | 6.7 | | |
| RB20035 | 200 | 295 | 247.7 | 35 | 5-3 | 2 | 225 | 270 | 151 | 252 | 9.6 | | |
| RB22025 | 220 | 280 | 250.1 | 25 | 3.5-2 | 2 | 235 | 265 | 92.3 | 171 | 4.1 | | |
| RB24025 | 240 | 300 | 269 | 25 | 3.5-2 | 2.5 | 256 | 281 | 68.3 | 145 | 4.5 | | |
| RB25025 | 250 | 310 | 277.5 | 25 | 3.5-2 | 2.5 | 265 | 290 | 69.3 | 150 | 5 | | |
| RB25030 | 250 | 330 | 287.5 | 30 | 4.5-3 | 2.5 | 269 | 306 | 126 | 244 | 8.1 | | |
| RB25040 | 250 | 355 | 300.7 | 40 | 6-3.5 | 2.5 | 275 | 326 | 195 | 348 | 14.8 | | |
| RB30025 | 300 | 360 | 328 | 25 | 3.5-2 | 2.5 | 315 | 340 | 76.3 | 178 | 5.9 | | |
| RB30035 | 300 | 395 | 345 | 35 | 5-3 | 2.5 | 322 | 368 | 183 | 367 | 13.4 | | |
| RB30040 | 300 | 405 | 351.6 | 40 | 6-3.5 | 2.5 | 326 | 377 | 212 | 409 | 17.2 | | |
| RB35020 | 350 | 400 | 373.4 | 20 | 3.5-1.6 | 2.5 | 363 | 383 | 54.1 | 143 | 3.9 | | |
| RB40035 | 400 | 480 | 440.3 | 35 | 5-3 | 2.5 | 422 | 459 | 156 | 370 | 14.5 | | |
| RB40040 | 400 | 510 | 453.4 | 40 | 6-3.5 | 2.5 | 428 | 479 | 241 | 531 | 23.5 | | |
| RB45025 | 450 | 500 | 474 | 25 | 3.5-1.6 | 1 | 464 | 484 | 61.7 | 182 | 6.6 | | |
| RB50025 | 500 | 550 | 524.2 | 25 | 3.6-1.6 | 1 | 514 | 534 | 65.5 | 201 | 7.3 | | |
| RB50040 | 500 | 600 | 548.8 | 40 | 6-3 | 2.5 | 526 | 572 | 239 | 607 | 26 | | |
| RB50050 | 500 | 625 | 561.6 | 50 | 6-3.5 | 2.5 | 536 | 587 | 267 | 653 | 41.7 | | |
| RB60040 | 600 | 700 | 650 | 40 | 6-3 | 3 | 627 | 673 | 264 | 721 | 29 | | |
| RB70045 | 700 | 815 | 753.5 | 45 | 6-3 | 3 | 731 | 777 | 281 | 836 | 46 | | |

RB Crossed Roller Bearings

| | | | | | | | | | | | |
|-----------|------|------|--------|-----|-----|---|------|------|------|------|-----|
| RB80070 | 800 | 950 | 868.1 | 70 | 6-4 | 4 | 836 | 900 | 468 | 1330 | 105 |
| RB90070 | 900 | 1050 | 969 | 70 | 6-4 | 4 | 937 | 1001 | 494 | 1490 | 120 |
| RB1000110 | 1000 | 1250 | 1114 | 110 | 6-6 | 5 | 1057 | 1171 | 1220 | 3220 | 360 |
| RB1250110 | 1250 | 1500 | 1365.8 | 110 | 6-6 | 5 | 1308 | 1423 | 1350 | 3970 | 440 |